


# Architectural Specialties, Inc.

## Aluminum Roof Hatch Self Flashing Aluminum Curb

**Specifications:** Furnish roof access hatches model (specify) as manufactured by ARCHITECTURAL SPECIALTIES, INC. Unit shall be fully assembled.

The unit is to be constructed of an aluminum lid and aluminum base. Door and curb base corners shall be mitered and fully welded and equipped with integral metal cap flashing for weathertight installation. Door shall be equipped with 1" insulation between panel and liner and a neoprene gasket seal. Curb base insulation shall be 1/2" rigid insulation.

Unit shall be equipped with inside locking handle and pad lock hasp, and a compression-operated shock absorbing cylindrical spring. All hardware shall be plated. Installation shall be in accordance with manufacturer's instructions.

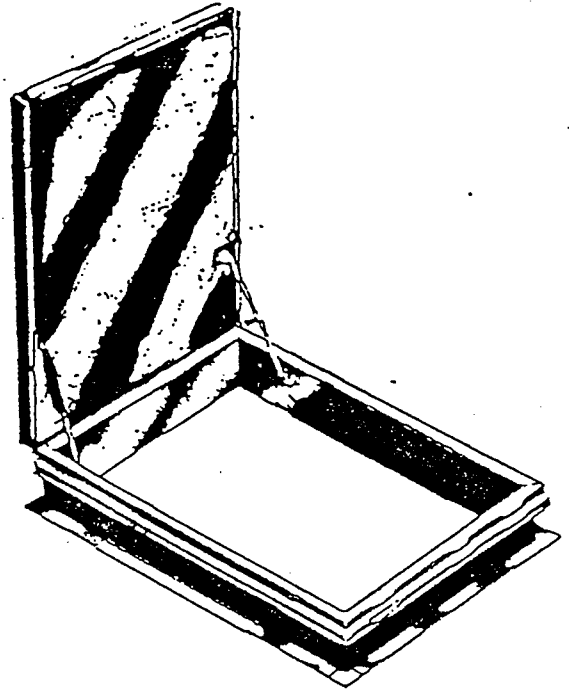

### Description:

#### CURB BASE

.080 aluminum with integral metal cap flashing  
3" nail flange to secure to roof deck.

#### DOOR SEAL

Neoprene gasket.

#### INSULATION

1" thick insulation between door panel and liner.  
1/2" rigid insulation surrounding base.

#### HINGES

noncorrosive 3" hinges with non-removeable pins.

#### LINKAGE

10 gauge steel automatically locking stop arm for opening and closing.

#### LID

11 gauge aluminum.

#### LATCH

Tapered, inside locking handle with interior padlock  
COMPRESSION ROD

Compression operated, shock absorbing cylinder.

#### FINISH

SH Models - mill finish


Other coatings available at additional cost.

#### CLEAR OPENING

2'6" x 3'0", 2'6" x 4'6", 2'6" x 5'0", 3'0" x 3'0"  
3'0" x 4'0", 4'0" x 4'0"

#### SIZES

Width x Length, Inside Dimension.

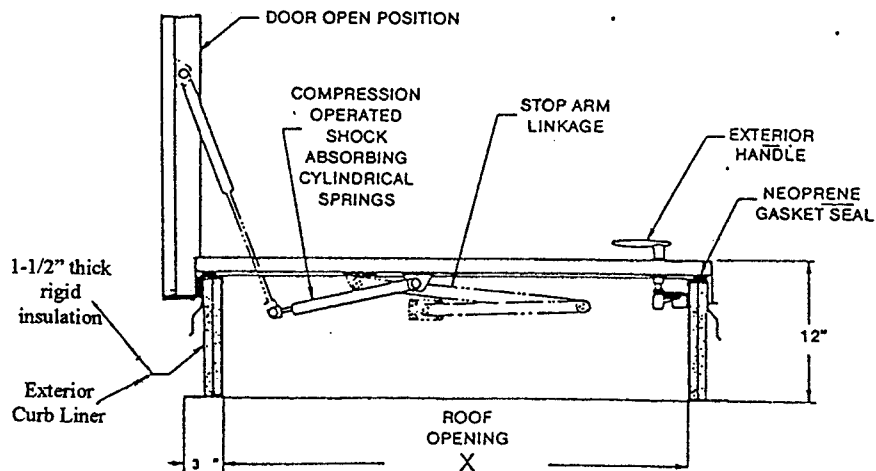

**DISTRIBUTOR:** \_\_\_\_\_

**PROJECT:** \_\_\_\_\_

**Project Address:** \_\_\_\_\_

**CONTRACTOR:** \_\_\_\_\_

**ARCHITECT:** \_\_\_\_\_